






TAV50D-V2 Coupling

Drawbeam mounting and installation instructions



TAV50D-V2

Weight: 45kg
D-value: 220kN
Dc-value: 160kN
V-value: 50kN
S-value: 1000kg
Type: TAV50D-v2
Class: C50-X

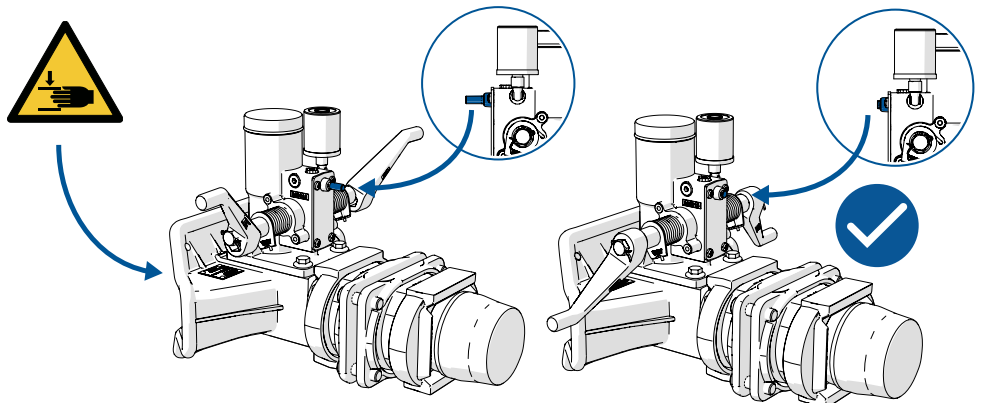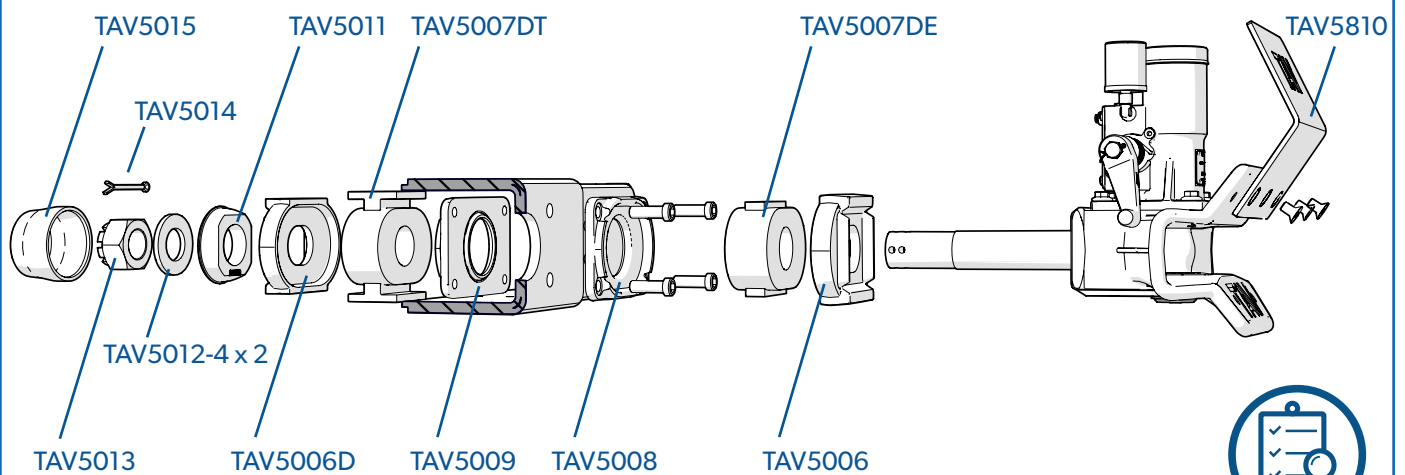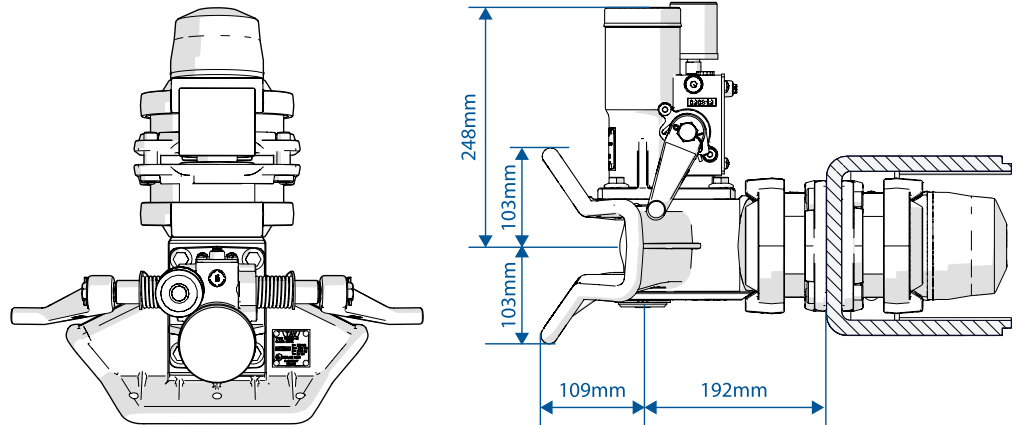






Space requirement: at least 100mm of free space around the coupling

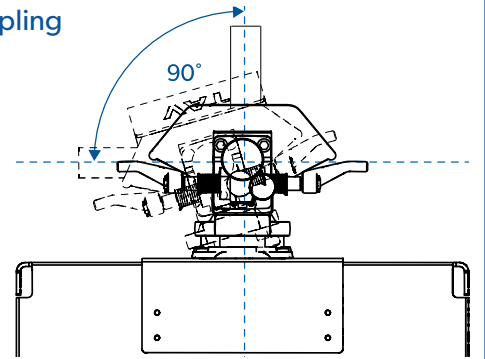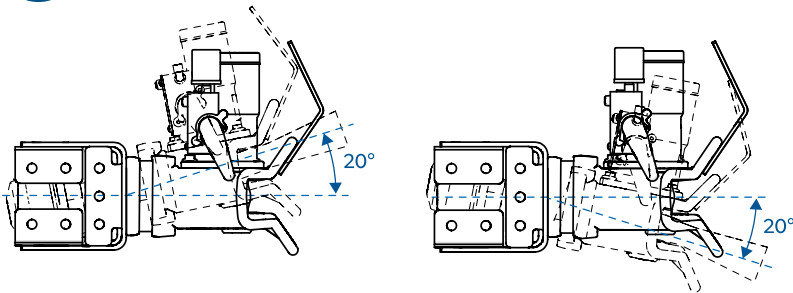


1A Installation to TAV drawbeam

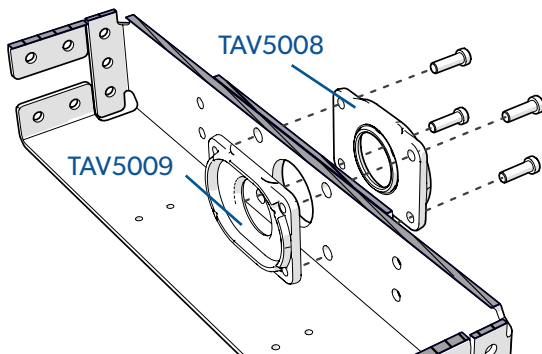


1B Install brackets when using another manufacturer's drawbeam

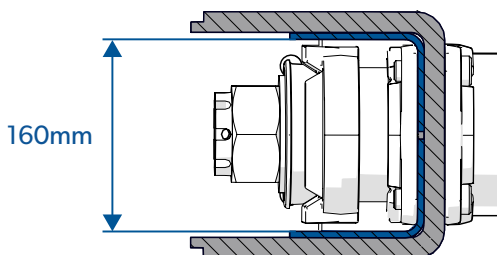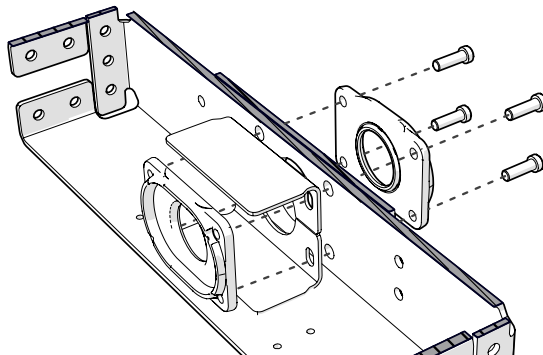


TAV736




TAV736-2



TAV736-3



220Nm
Tighten with torque wrench

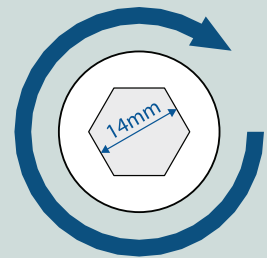

BOLTS

Bolt can not exceed or fall below this dimension

