




TAV750 Rear underrun protection device

Adjustable extension TAV217 for B190 drawbeam

Installation instructions

TAV750 + TAV216-2 + TAV217

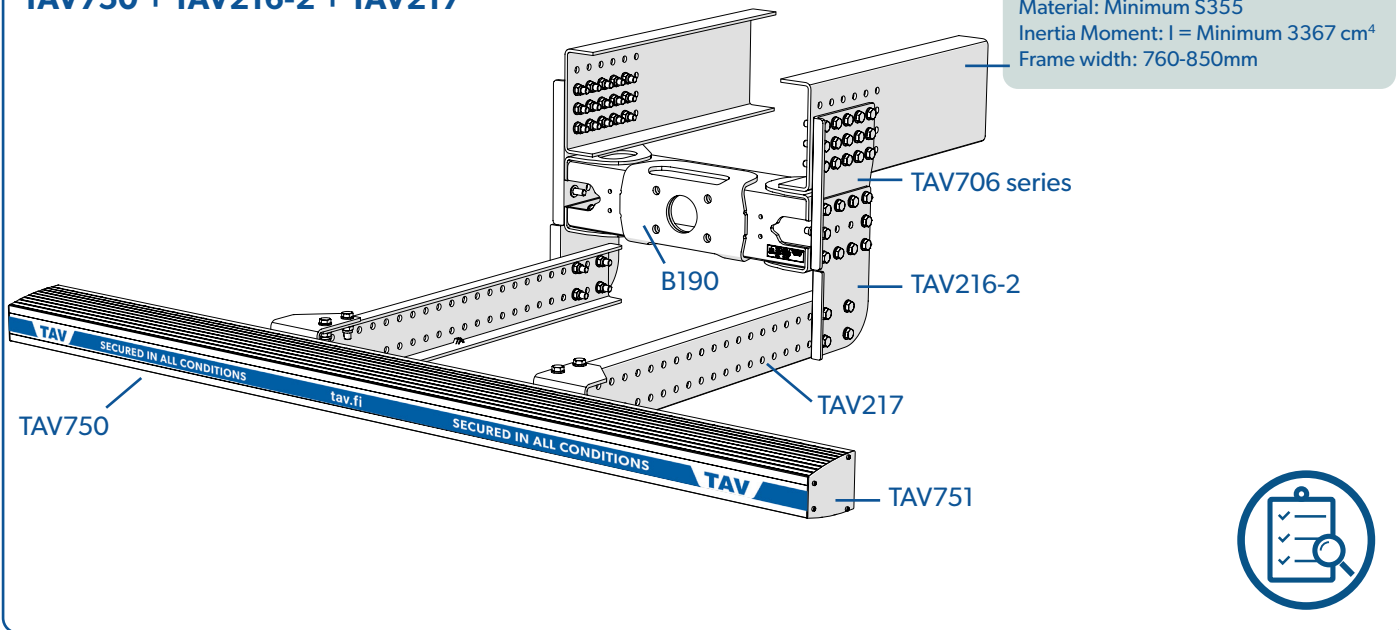

Vehicle category	L	Vehicle category	Suspension	H
N3	Max. 300mm	N3 & O4	Pneumatic suspension	Max. 450mm
O4	Max. 192mm	N3	Leaf spring suspension	Max. 500mm
O4 platform lift or tipping-trailer	Max. 300mm	O4	Other suspension	Max. 500mm or max. 8° departure angle



1

- x 20
- x 40
- x 20

250Nm
Tighten with torque wrench

2

TAV217 TAV217

- x 8
- x 16
- x 8

!

250Nm
Tighten with torque wrench

M16

10.9

TAV217

3

TAV213-2 TAV213-2

- x 4
- x 8
- x 4

!

250Nm
Tighten with torque wrench

M16

10.9

4

5

M16 x 40

M16 x 30

- x 4 M16 x 40
- x 2 M16 x 30
- x 6

M16 x 40

M16 x 30

!

150Nm
Tighten with torque wrench

M16

10.9

6

TAV751

Thread-forming
M5 x 16