




# TAV750 Rear underrun protection device

## TAV218 Adjustable extension for TAV200/TAV220 Drawbeam

### Installation instructions

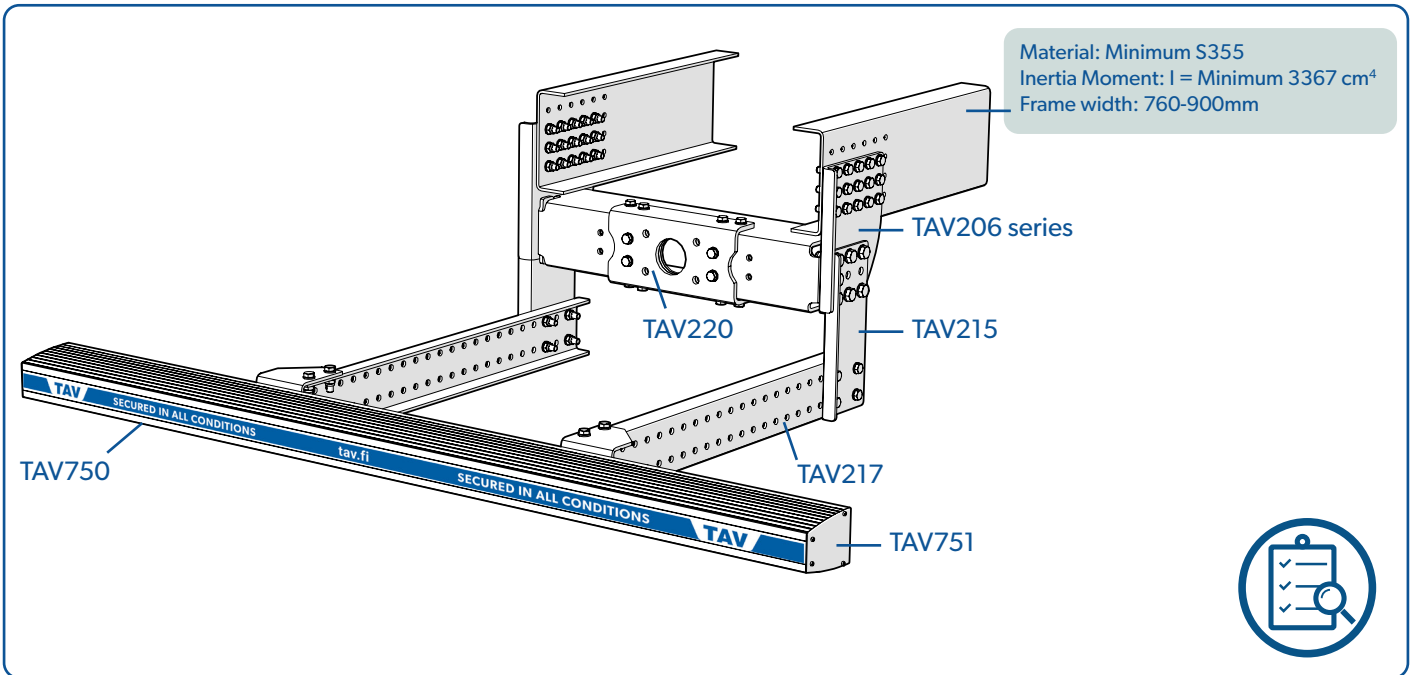

Vehicle category	L	Vehicle category	Suspension	H
N3	Max. 300mm	N3 & O4	Pneumatic suspension	Max. 450mm
O4	Max. 192mm	N3	Leaf spring suspension	Max. 500mm
O4 platform lift or tipping-trailer	Max. 300mm	O4	Other suspension	Max. 500mm or max. 8° departure angle



**1**

**2**

x 8  
 x 16  
 x 8

250Nm  
Tighten with torque wrench

M16 10.9

TAV217 TAV217

**3**

x 4  
 x 8  
 x 4

250Nm  
Tighten with torque wrench

M16 10.9

TAV213-2 TAV213-2

**4**

**5**

x 4 M16 x 40  
 x 2 M16 x 30  
 x 6

150Nm  
Tighten with torque wrench

M16

M16 x 40 M16 x 30

**6**

TAV751

Thread-forming  
M5 x 16